




## SIS TYPE 30 / 600 GL AS PER DIN EN 14470-1 (TYPE 30)

**Approved for the restricted storage of flammable liquids at the workplace as per DIN EN 14470-1 (type 30) and TRGS 510, annex 1**

- ◆ Whole construction tested and approved by an authorized materials testing institute as per DIN EN 14470-1 (type 30) with a fire resistance >30 minutes
- ◆ GS-approved safety (GS-sign)
- ◆ Body made from B1 material RAL 7035 - light grey, door either in RAL 7035 - light grey or RAL 1007 - daffodil yellow with fire safety glass
- ◆ Height-adjustable shelves at intervals of 32 mm
- ◆ Automatic thermal closing mechanism if fire occurs
  - Door after temperature increase to ≤50°C and
  - Inlet and outlet channels after temperature increase to 70°C (±10°C)
- ◆ DN 80 ventilation connection for exhaust air extraction on cabinet roof
- ◆ Operation complies with TRGS 510 (approved even without exhaust air connection!)
- ◆ Ground connection in accordance with TRBS 2153 (avoidance of sources of ignition)
- ◆ Markings according to DIN EN 14470-1 / TRGS 510 / ISO 3864 / ASR A1.3
- ◆ Leveling feet for installing cabinet horizontally
- ◆ Door with cylinder lock
- ◆ Door hinged right as standard

### With inner fittings:

- ◆ 1 x base sump tray (sump capacity 22 liters) as per WHG - **Ü-sign according to StawaR**
- ◆ 1 x perforated base tray cover as 1st storing level
- ◆ 3 x shelves
- ◆ **door hold-open device**

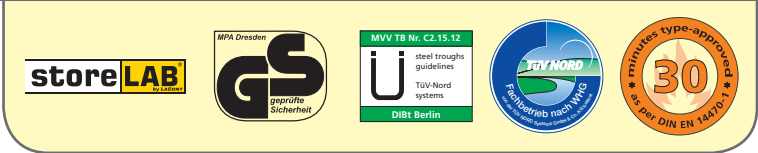

**SiS Type 30 / 600 GL, Article no. B80-2655-A, door RAL 1007 - daffodil yellow, incl. 3 shelves, base sump tray and perforated cover plate**



**SiS Type 30 / 600 GL, Article no. B80-2654-A, door RAL 7035 - light grey, incl. 3 shelves, base sump tray and perforated cover plate**



**SiS Type 30 / 600 GL, Article no. B80-2655-A, door RAL 1007 - daffodil yellow, incl. 3 shelves, base sump tray and perforated cover plate**



**Socle included, with removable panel**



Model	SiS Type 30 / 600 GL	
External dimensions W x D x H (mm)	595 x 595 x 1935	
Internal dimensions W x D x H (mm)	475 x 515 x 1600	
Door with fire safety glass	1 (DIN right)	
Weight (kg)	190	
<b>Outer body: RAL 7035 - light grey</b>	<b>Material inner fittings</b>	
<b>Article no., door: RAL 7035 - light grey</b>	sheet steel	<b>B80-2654-A</b>
<b>Article no., door: RAL 1007 - daffodil yellow</b>	sheet steel	<b>B80-2655-A</b>

Accessories	Material	Article no.
Shelf	sheet steel	<b>B80-2611-A</b>